

MLS PROGRAMMER

HP2000


The HP2000 MLS Digital Programmer Handset is designed for use with the MLS range of lighting control systems. The programmable parameters of the various products can be configured via this battery-powered, hand-held, infrared unit.

The HP2000 allows commissioning and re-commissioning to be carried out with virtually no disturbance to the building's occupants. Settings are chosen from the HP2000's menu and transferred instantaneously to the product being programmed by pressing the Upload button.

The commissioning engineer receives positive feedback at all stages of the process.


Settings from one product can be copied in seconds to another and settings can be checked at any time using the HP2000's download function.

During the lifetime of an installation, the requirements for lighting may change. Changes to the layout or use of a workspace, no matter how extensive, require no alteration to the wiring of the system.

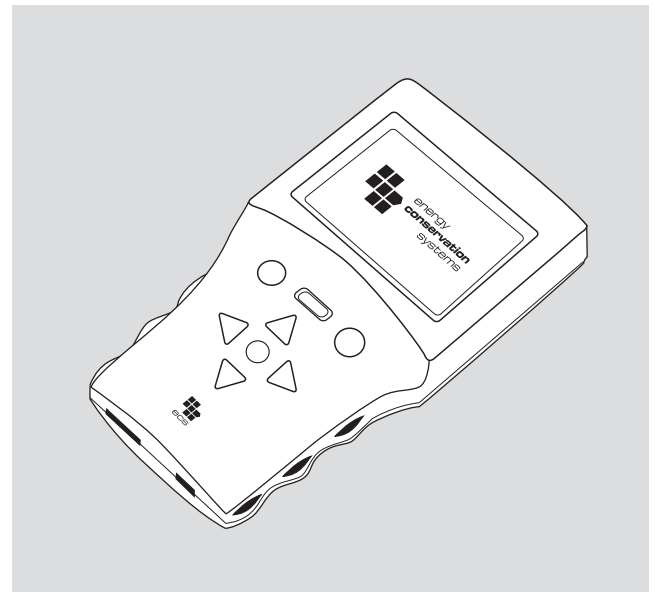

Reprogramming of the parameters set during commissioning can be carried out quickly and easily using the HP2000.

The HP2000 can be easily upgraded to accommodate product revisions/additions by the supplied PC Software package via USB.

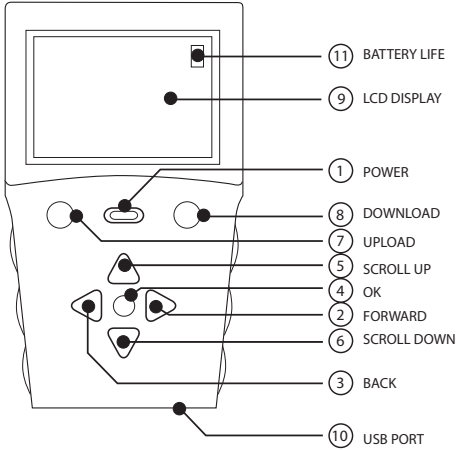Hardware	Technical
	<p>Supply: 3 x AAA Alkaline cells</p> <p>Display: 128x64 monochrome dot matrix LCD</p> <p>Weight: 228g</p> <p>Dimensions: 150mm x 85mm x 35mm (l x w x d)</p> <p>System Requirements (for product upgrades)</p> <p>Windows XP, 2000, ME, 98SE</p> <p>Intel or equivalent IBM PC compatible processor</p> <p>64mb ram</p> <p>32mb free HDD space</p> <p>Free USB port</p> <p>CD-Rom drive for software installation</p> <p>Internet connection 28.8kbps or better</p>